

SERVICE

2500M AND MM TELEPHONE SETS

1. GENERAL

TABLE B

1.01 Reissued to:

- Revise Fig. 1 and 2
- Revise Table A

POLARITY GUARD CONNECTIONS
[819040528 (P-90D052) GUARD ASSEMBLY]

LEAD	COLOR	REMOVE FROM NET.	CONNECT TO	
			POLARITY GUARD	NET.
Line Switch	W	C	S	
Dial	BK	RR	T	
Polarity Guard	W G			C RR

Note: For use when specified by local instructions. For end-to-end signaling installation.

◆TABLE A◆

LINE AND RINGER CONNECTIONS
FOR COMMON AUDIBLE RING WITH 1A1 OR 1A2 KTS


MOUNTING CORD LEAD AT CONNECTING BLOCK						CONNECTIONS IN SET							
						6-CONDUCTOR MOUNTING CORD OR 6-CONDUCTOR JACK LEADS						C4B RINGER LEADS	
(G)	(R)	(BK)	(Y)	(BL)	(W)	(G)	(R)	(BK)	(Y)	(BL)	(W)	(BK)	(R)
Tip	Ring	A	A1	B1	R1	F	A	L1	G	L2	Note 3	L2	Note 3

Notes:

1. Sets are furnished wired for 1A1 or 1A2 KTS with bridged ringing.
2. If set is equipped with a 4-conductor mounting cord (Fig. 1), replace with a 6-conductor mounting cord. If set is equipped with a 4-conductor jack and 4-conductor mounting cord (Fig. 2), replace with a 6-conductor jack and 6-conductor mounting cord.
3. Use D-161488 connector to connect the (R) ringer lead to the (W) mounting cord or jack lead.

NOTICE


Not for use or disclosure outside the
Bell System except under written agreement

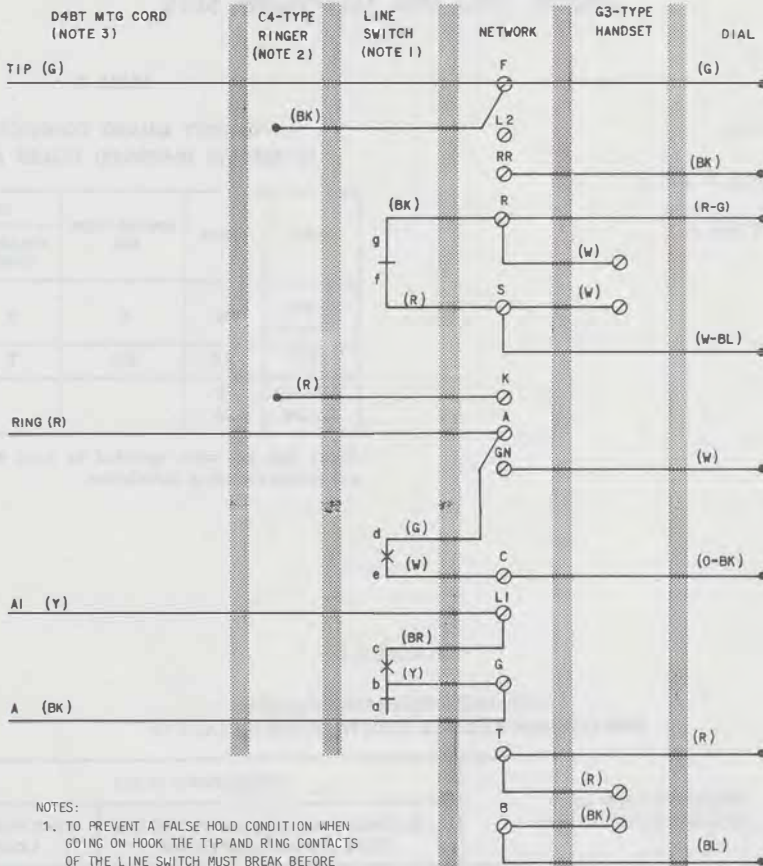

NOTES:

1. TO PREVENT A FALSE HOLD CONDITION WHEN GOING ON HOOK THE TIP AND RING CONTACTS OF THE LINE SWITCH MUST BREAK BEFORE A-LEAD CONTACTS BREAK.
2. TO SILENCE RINGER PERMANENTLY, REFER TO APPROPRIATE RINGER SECTION IN DIVISION 501.
3. IF COMMON AUDIBLE RINGING IS REQUIRED, A 6-CONDUCTOR MOUNTING CORD IS REQUIRED. REFER TO TABLE A.

Fig. 1—2500M Telephone Set, Connections

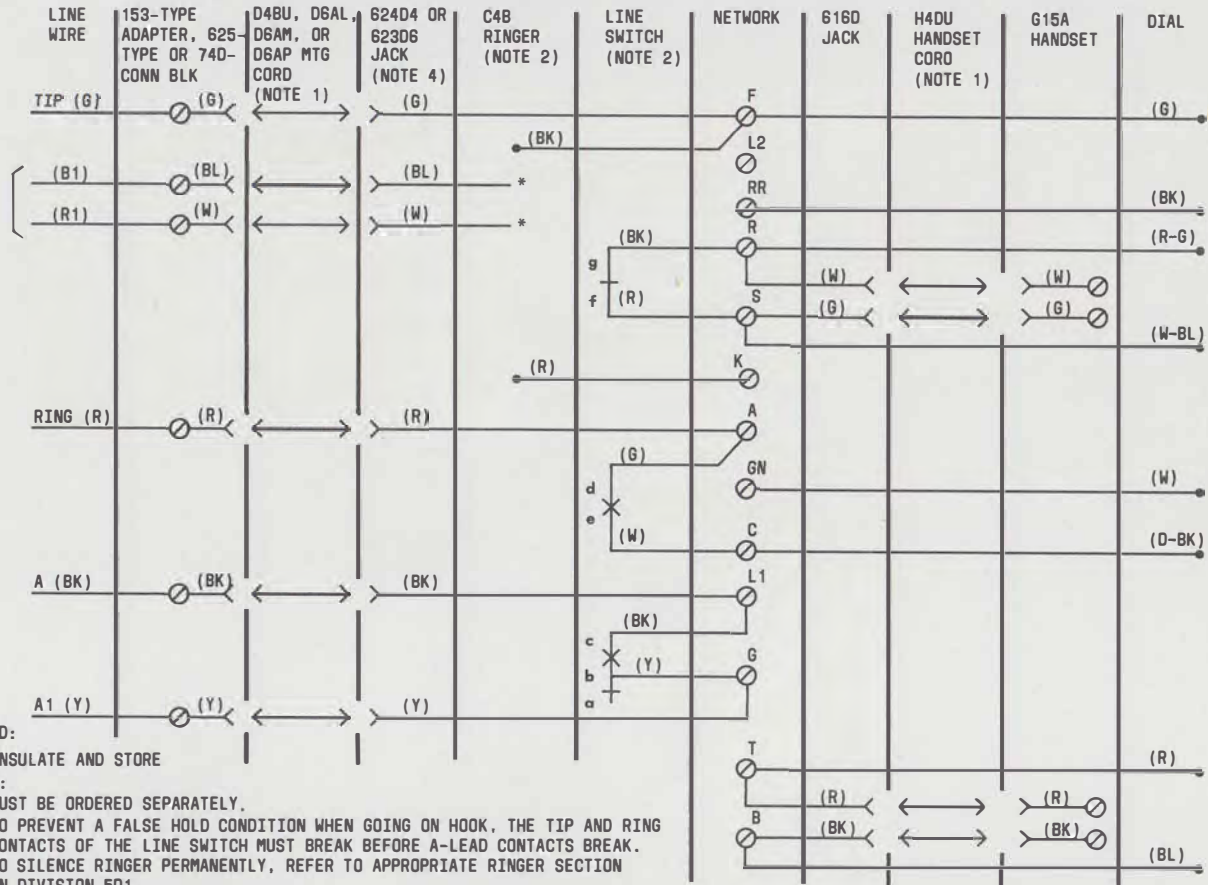

LEGEND:

* INSULATE AND STORE

NOTES:

1. MUST BE ORDERED SEPARATELY.
2. TO PREVENT A FALSE HOLD CONDITION WHEN GOING ON HOOK, THE TIP AND RING CONTACTS OF THE LINE SWITCH MUST BREAK BEFORE A-LEAD CONTACTS BREAK.
3. TO SILENCE RINGER PERMANENTLY, REFER TO APPROPRIATE RINGER SECTION IN DIVISION 501.
4. IF COMMON AUDIBLE RINGING IS REQUIRED, A 623D6 SJACK IS REQUIRED. REFER TO TABLE A.

Fig. 2—2500MM Telephone Set, Connections