

SERVICE

500R/S AND 500SM TELEPHONE SETS

CONNECTIONS

1. GENERAL

◆ TABLE A ◆

LINE AND C4B RINGER CONNECTIONS 500R/S AND 500SM

1.01 This section contains information on the 500R/S (MD) and 500SM telephone sets.

1.02 This section is reissued to:

- Show 500R/S telephone sets MD
- Revise Fig. 2 to update information.

| WIRE OR LEAD (NOTE 1) | COLOR | RING PARTY | TIP PARTY NO IDENT GROUND |
|--|------------------|---------------|---------------------------------|
| Mtg Cord in Set 500R/S | (W-BL) [G] | F | F |
| 623D4 Jack 500SM | (G) | F | F |
| Move Strap from F Term on Net. to | (G) | E1 | |
| Move Strap from Term. 3 to | (S) | | E1 |
| C4B Ringer (Note 2) | (R) (BK) | K G | K G |
| Mtg Cord at Conn Block (Line Only) 500R/S | (G-W) [R] | Ring | Tip |
| | (W-BL) [G] | Tip | Ring |
| | (BL-W) [BR-G] | Ring | Tip |
| Line Wire at Conn Block 500SM | (R) (G) | Ring Tip | Ring Tip |

Note 1: Only the optional leads are shown in the table. Connections for the remaining leads are shown in Fig. 1 and 2.

Note 2: To permanently silence ringer, refer to Section 501-250-303.

{ } Current color code.

[] MD color code.

NOTICE

Not for use or disclosure outside the
Bell System except under written agreement

TABLE B
LINE AND C4A RINGER CONNECTIONS 500R/S


| WIRE OR LEAD | COLOR | INDIV OR BRIDGED | RING PARTY | TIP PARTY NO IDENT GROUND | TIP PARTY IDENT GRD | |
|---|---|------------------------|---------------------|---------------------------------|---------------------------|--------------------|
| | | | | | 1000Ω | 2650Ω |
| Mtg Cord in Set | (W-BL) [G] | G | F | F | F | F |
| Strap from G Term. on Net. to | (G) | F | E1 | E1 | E1 | E1 |
| C4A Ringer | (R) (BK) (S) (S-R) | L2 G K A | L2 G K A | L2 G K A | K G B B | B B K G |
| Line Switch | (W-S) [S-BR] | Term. 2 | Term. 2 | Term. 2 | A of Net. | A of Net. |
| Mtg Cord at Conn. Block (Line Only) | (G-W) [R] (W-BL) [G] (BL-W) [BR-G] | Ring Tip Ring | Ring Tip Ring | Tip Ring Tip | Tip Ring Tip | Tip Ring Tip |
| Strap from A To L2 on Net. | (S) | * | * | * | * | * |
| 44A Conn Block Strap | | 1 to 6 | 1 to 6 | 2 to 6 | 2 to 6 | 2 to 6 |

Note: To permanently silence ringer, refer to Section 501-250-303.

* Remove strap, if in place, when using C4A ringer.

() Current color code

[] MD color code

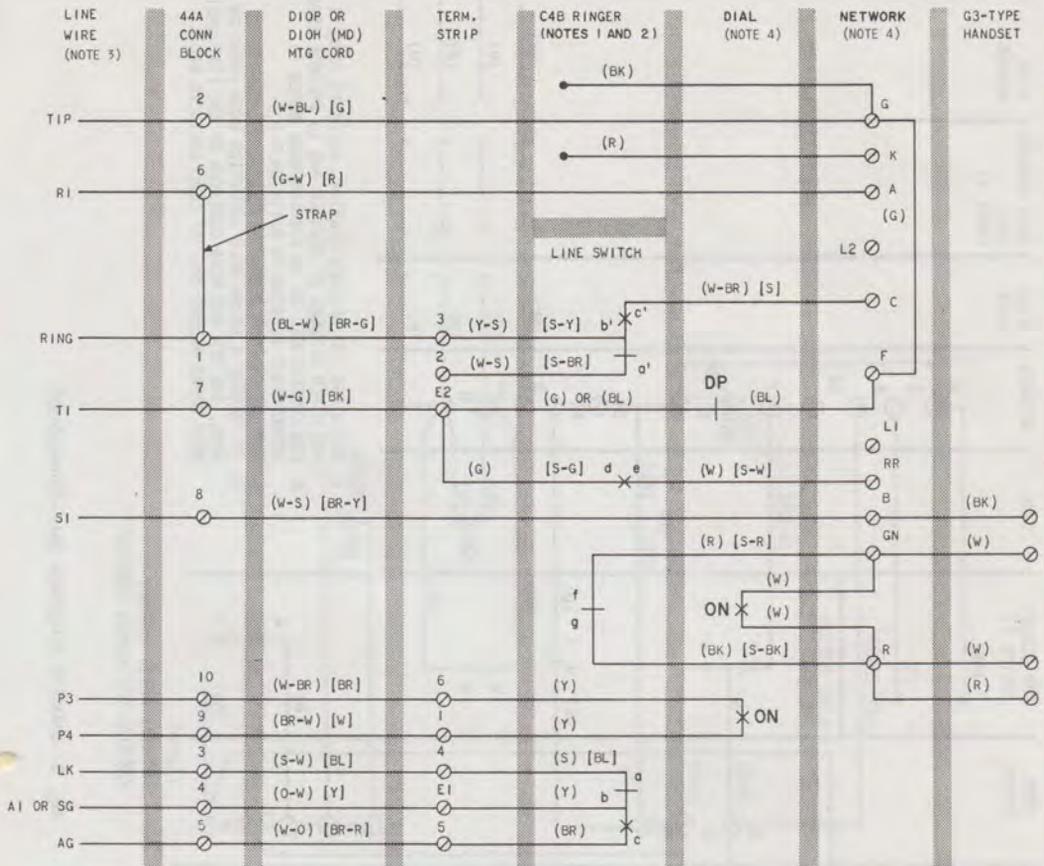

NOTES:

1. SET WIRED FOR BRIDGED SERVICE. REFER TO TABLE A FOR OTHER CLASSES OF SERVICE AND TO SILENCE RINGER.
2. IF C4A RINGER IS USED, REFER TO TABLE B FOR ALL CLASSES OF SERVICE.
3. FOR CONNECTIONS TO SPEAKERPHONE REFER TO APPROPRIATE SECTION IN DIVISION 512.
4. FOR MANUAL SERVICE, REPLACE DIAL WITH AN APPARATUS BLANK AND TRANSFER (G) STRAP FROM F TERMINAL ON NETWORK TO E2 TERMINAL ON TERMINAL STRIP.

LEGEND:

- () CURRENT COLOR CODE
 { } MD COLOR CODE
 DP - DIAL PULSE CONTACT
 ON - DIAL OFF-NORMAL CONTACT

Fig. 1—500R/S (MD) Telephone Set, Connections

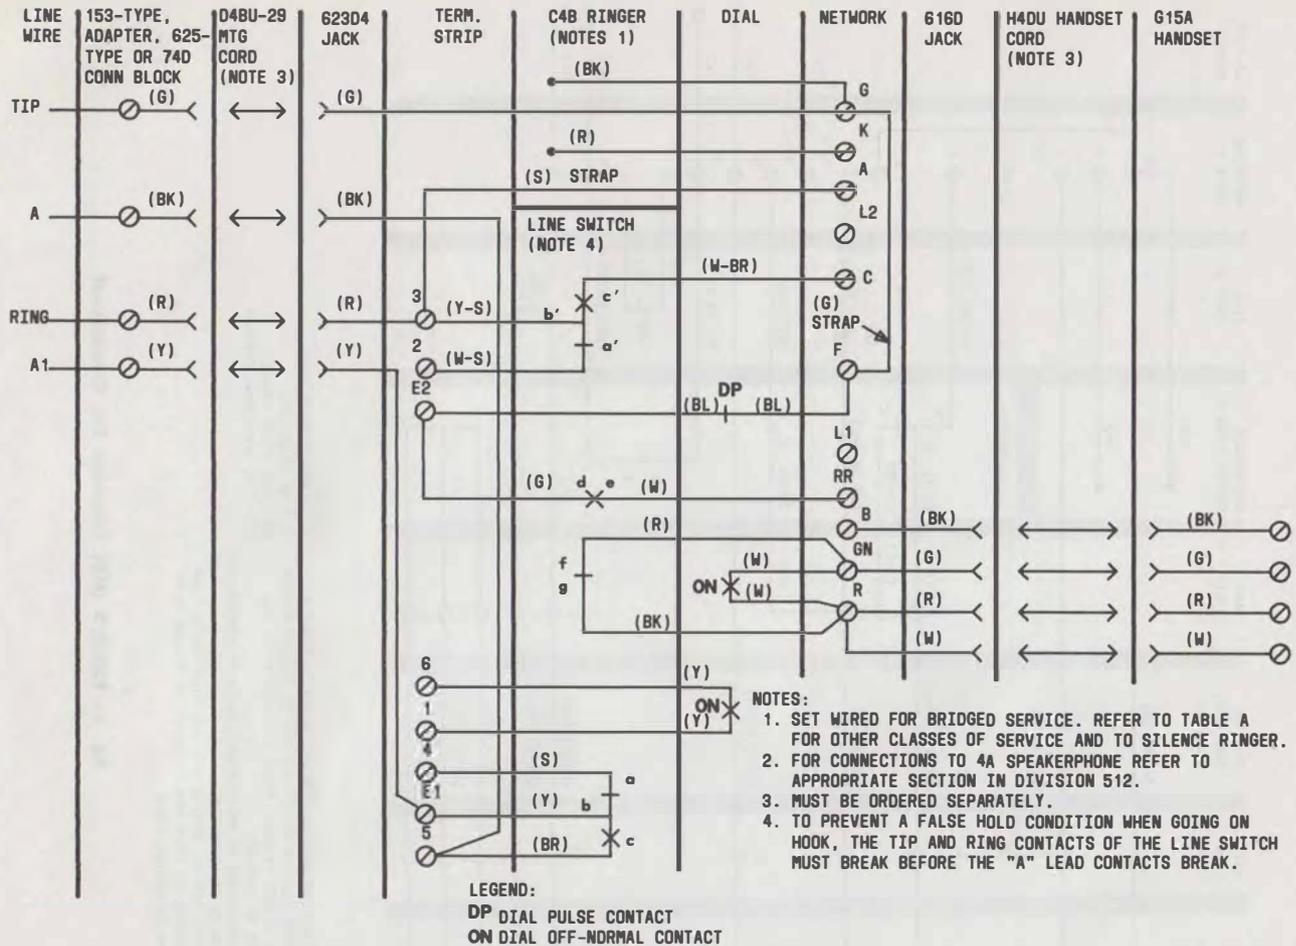


Fig. 2—500SM Telephone Set—Connections