

## SERVICE


### 751-TYPE TELEPHONE SETS

#### 1. GENERAL

1.01 Reissued to add nontechnical changes to Fig. 1, 2, and Read note.



*The 3A cord reel shall be used when the telephone set is subjected to temperatures below 40 degrees F. The 3B cord reel shall be used when the telephone set is not subjected to temperatures below 40 degrees F.*

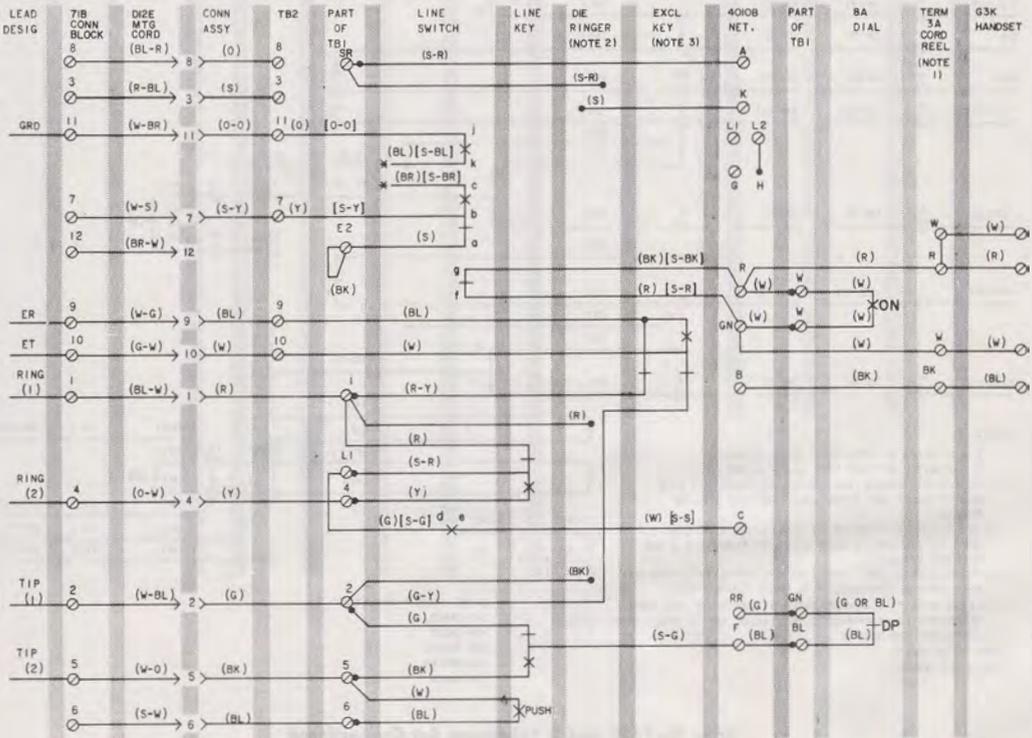

**NOTES:**

1. CURRENT MODELS OF THE 3A CORD REEL ARE NOT EQUIPPED WITH A TERMINAL BLOCK.
2. SET WIRED FOR RINGING ON LINE 1, TO RING ON LINE 2, MOVE (R) AND (BK) RINGER 1 FADS TO TERMINALS 4 AND 5 RESPECTIVELY.

3. TO EXCLUDE ON LINE 2, MOVE (R-Y) AND (G-Y) EXCLUSION KEY LEADS TO TERMINALS 4 AND 5 RESPECTIVELY.
- \* INSULATED AND STORED  
( ) CURRENT COLOR CODE [ ] MD COLOR CODE

DP - DIAL PULSE  
ON - OFF NORMAL  
LINE SWITCH SEQUENCE:  
bc - MAKE ab - BREAK  
de - MAKE fg - BREAK  
jk - MAKE

◆ Fig. 1—751A and B (MD) Telephone Set Connections ◆



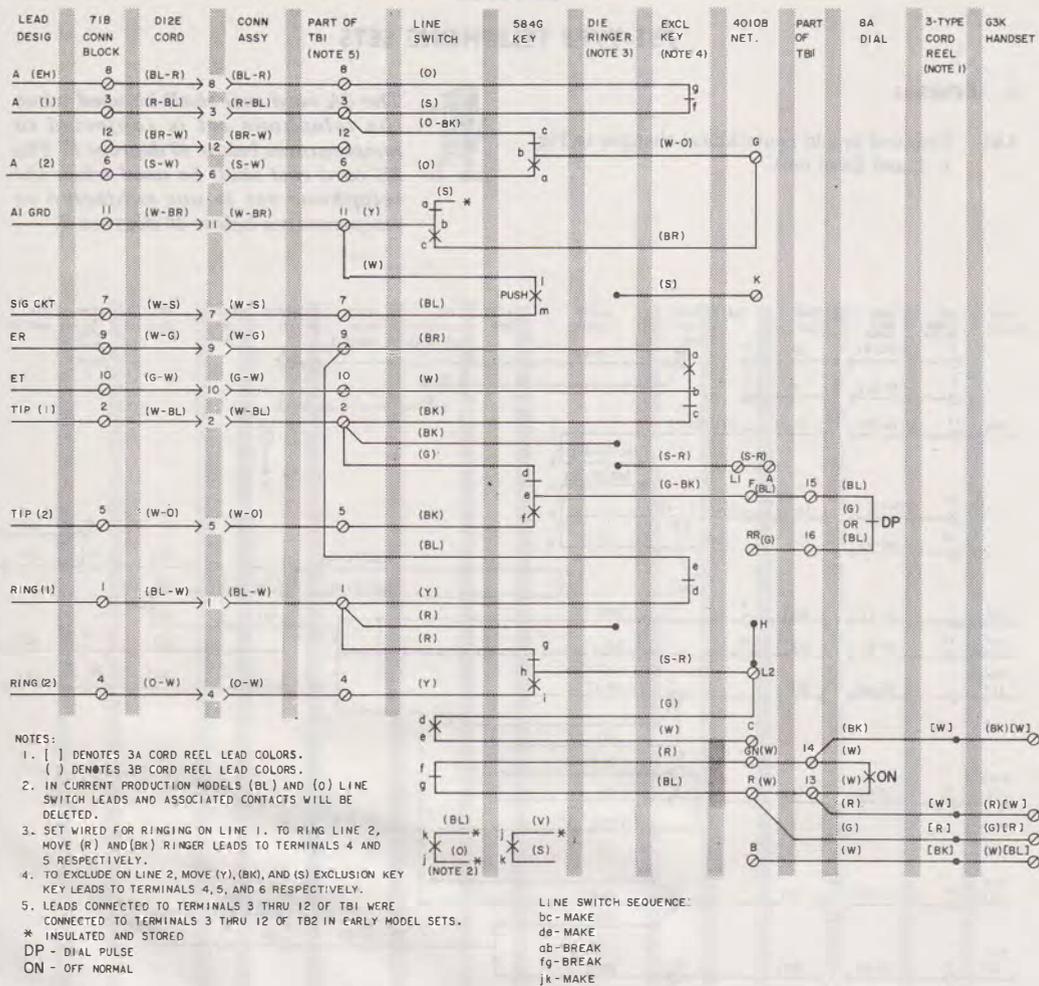


Fig. 2—751C and D Telephone Set Connections