

SERVICE

753A AND B TELEPHONE SETS


1. GENERAL

telephone set is not subjected to temperatures below 40 degrees F.

- 1.01 Reissued to add nontechnical changes to Fig. 1.



The 3A cord reels shall be used when the telephone set is subjected to temperatures below 40 degrees F. The 3B cord reel shall be used when the

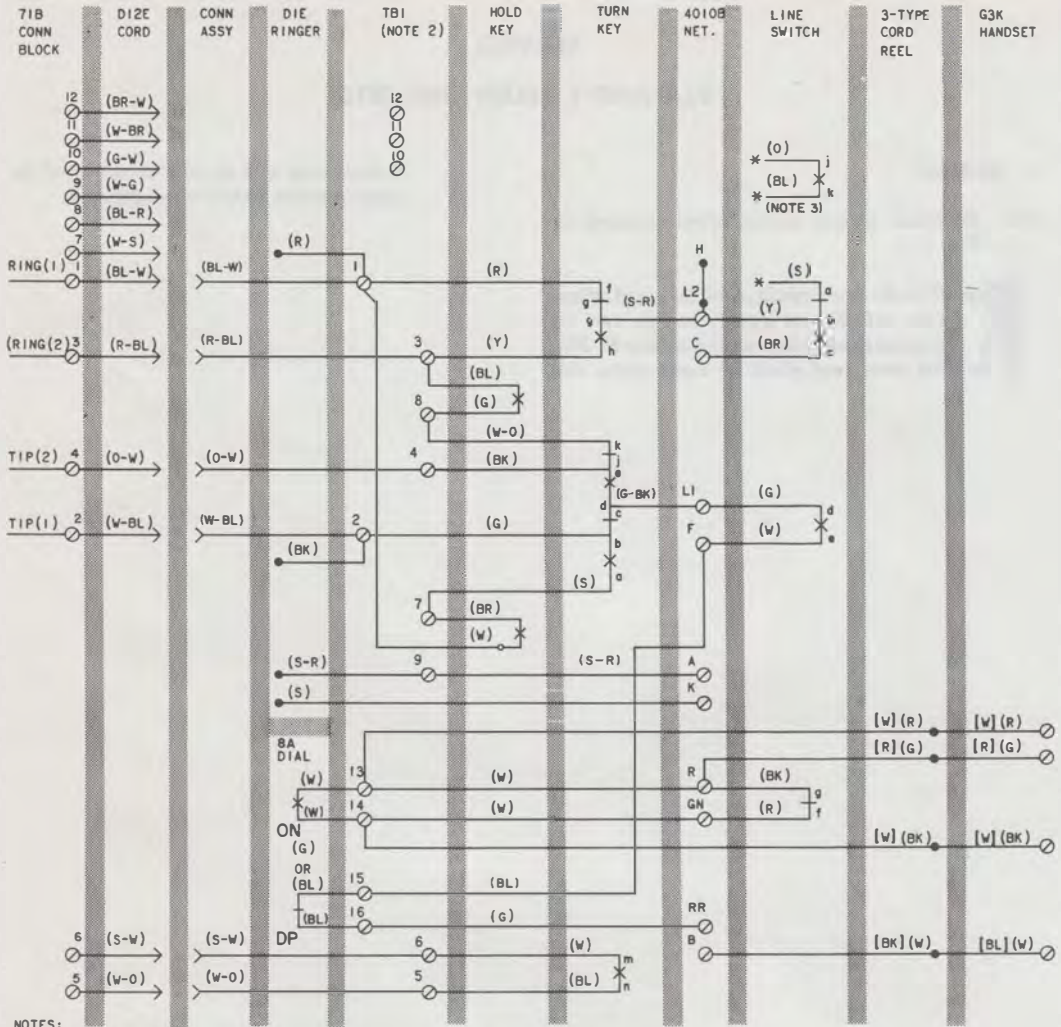

NOTES:

1. CONNECTIONS PROVIDE FOR RINGING ON LINE 1. FOR RINGING ON LINE 2, MOVE (R) AND (BK) RINGER LEADS TO TERMINALS 3 AND 4, RESPECTIVELY.
 2. TERMINALS 3 THRU 12 OF TB1 WERE LOCATED ON TB2 IN EARLY MODEL SETS.
 3. CONTACTS j-k AND ASSOCIATED (o) AND (BL) LEADS HAVE BEEN OMITTED IN CURRENT MODEL SETS.
- [] 3A CORD REEL LEAD COLORS.
 () 3B CORD REEL LEAD COLORS.
 * INSULATED AND STORED.
 DP- DIAL PULSE
 ON- OFF NORMAL

LINE SWITCH SEQUENCE:
 bc - MAKE
 de - MAKE
 ab - BREAK
 fg - BREAK
 jk - MAKE

Fig. 1—753A and B Telephone Set, Connections