

TELEPHONE SETS—851- AND 2851-TYPE

1. GENERAL

1.001 This addendum supplements Section 503-601-101, Issue 7. Place this pink sheet ahead of the section.

1.002 This addendum is issued to:

- (a) Add information on the D-180864 Kit of Parts for use with Station Busy Lamp Option feature.
- (b) Delete KS-15724L1 diode for use with Station Busy Lamp Option feature.
- (c) Add information on handset cord jack lead connections in the 2851CM telephone set.

2. CHANGES TO SECTION

2.001 On Page 6, at the end of paragraph 3.16, add paragraph 3.16.1 as follows:

3.16.1 **Station Busy Lamp:** The D-180864 Kit of Parts is intended to provide a station busy lamp feature for multibutton wall telephone sets used in 1A1 and 1A2 key telephone systems. The kit of parts consists of the following:

1—840363972 Diode Assembly (533K diode)

For connection information, refer to Table B.

2.002 On Page 16, replace Table B.

2.003 On Page 25, replace Fig. 29 (Sheet 2 of 2).

♦TABLE B♦

CONNECTIONS FOR 1A KTS AND/OR STATION BUSY LAMP

STATION BUSY LAMP		WIRE OR LEAD							D-180864 KIT OF PARTS	
		LINE SWITCH			HOLD KEY		STRAP OR MTG CD CONDR			
		Y	BR	G	O-BK	BK-BL	V-S	G-V		Y-BR
With- out	1A	11	*	3	9	13	*	3	L2 ³	
	1A1-1A2	4	3	13	3	9	3	13	L2 ³	
With	1A	11	L2 ³	3	9	13	L2 ³	3	L2 ³	L2 ³ → 3
	1A1-1A2	4	L2 ³	13	3	9	L2 ³	13	L2 ³	

* Insulate and store.

† Network terminal, undesignated terminals are on terminal board.

Note: Use B battery supply from KTS if available. Do not use 10 volt ac lamp battery.

NOTICE

Not for use or disclosure outside the Bell System except under written agreement

NOTES:

1. CONNECTIONS FOR P1B RINGER SHOWN. RINGER CONNECTIONS FOR SETS EQUIPPED WITH P1A RINGER SAME AS P1B EXCEPT (BL), (S), AND (S-R) LEADS ARE INSULATED AND STORED. (CURRENT MODEL P1A RINGERS DO NOT HAVE (BL) LEAD).
 2. WHEN USING SPEAKERPHONE, REMOVE (G) LEAD FROM TERM 2 AND CONNECT TO TERM 1. REMOVE (BL) LEADS FROM TERMS 1 AND 2. INSULATE AND STORE.
 3. 2851 CM TELEPHONE SETS ARE SHIPPED WITH G15A HANDSETS AND H4DU HANDSET CORD.
 4. ON SETS MANUFACTURED PRIOR TO 4-1-78, THE GREEN AND WHITE HANDSET CORD JACK LEADS IN TELEPHONE SET WERE CONNECTED TO NETWORK TERMINALS R AND S, RESPECTIVELY.
- * INSULATED AND STORED

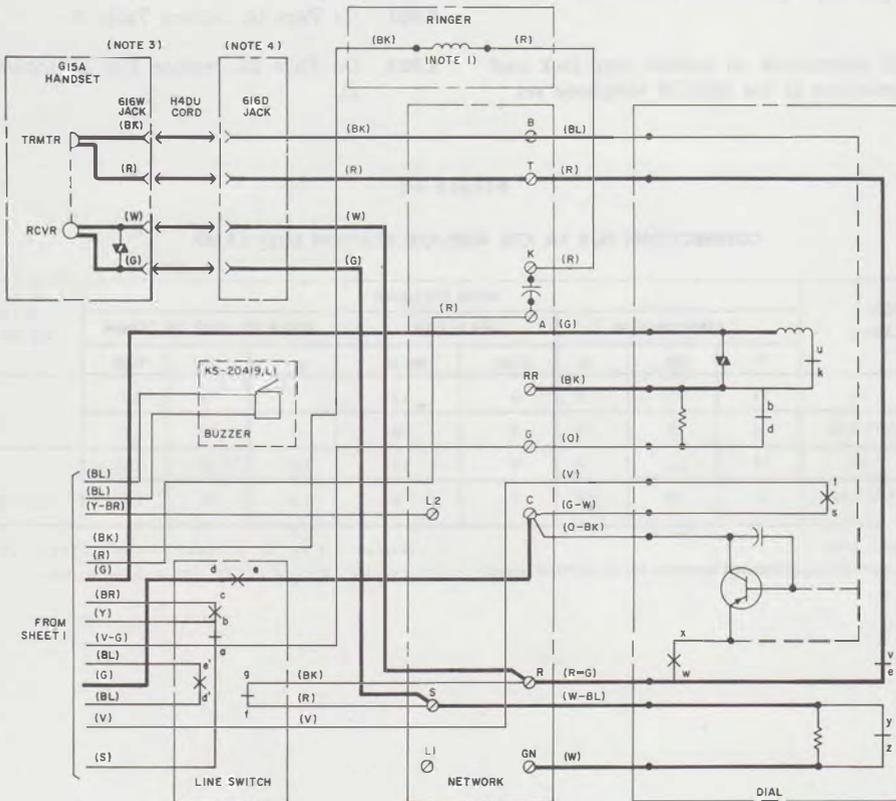


Fig. 29—2851CM Telephone Set, Connections (Sheet 2 of 2)